



Attorney Docket No. 9052-160

PATENT

IN THE UNITED STATES DESIGNATED OFFICE (DO/US)

In re: David Miles
Serial No.: 10/624,441
Filing Date: July 22, 2003
For: **RENDERING SCREW PRESSES AND METHODS OF OPERATING THE SAME**

Confirmation No.: 6411
Group Art Unit: 3725
Examiner: Jimmy T. Nguyen

Date: July 7, 2005

MAIL AMENDMENT
Commissioner for Patents
Post Office Box 1450
Alexandria, Virginia 22313-1450

SUBMITTAL OF PRIORITY DOCUMENT

Sir:

To complete the requirements of 35 USC 119, enclosed is a certified copy of the following UK priority application:

GB0306283.3, filed March 19, 2003.

Respectfully submitted,

D. Scott Moore
Registration No. 42,011

Myers Bigel Sibley & Sajovec, P.A.
P. O. Box 37428
Raleigh, North Carolina 27627
Telephone: (919) 854-1400
Facsimile: (919) 854-1401
Customer Number **20792**

Certificate of Mailing under 37 CFR 1.8

I hereby certify that this correspondence is being deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to Commissioner for Patents, Post Office Box 1450, Alexandria, Virginia 22313-1450 on July 7, 2005.

Traci A. Brown

THIS PAGE BLANK (USPTO)



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Controller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 in the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

Accordingly with the rules, the words "public limited company" may be replaced by p.l.c., P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 7 August 2003

**CERTIFIED COPY OF
PRIORITY DOCUMENT**

An Executive Agency of the Department of Trade and Industry

BEST AVAILABLE COPY

THIS PAGE BLANK (USPTO)

Patents Form 1/77

Patents Act 1977
(Rule 16)THE PATENT OFFICE
CF

19 MAR 2003

RECEIVED BY FAX

The
Patent
Office19MAR03 EP 03501-1 002973
P01/7700 000-0306283.3**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference

SPG/P101880GB

2. Patent application number

(The Patent Office will fill in this part)

0306283.3

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)De Smet Rosedowns Limited
Cannon Street
HULL
HU2 0AD
East YorkshirePatents ADP number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation

6611461001

4. Title of the invention

Improvements to Rendering Presses

5. Name of your agent (*if you have one*)

Harrison Goddard Foote

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)31 St Saviourgate
YORK
YO1 8NQPatents ADP number (*if you know it*)

07914237002 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number
(*if you know it*)Date of filing
(*day / month / year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(*day / month / year*)8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if*

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

Yes

Patents Form 1/77

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 7

Claim(s) 7

Abstract 1

Drawing(s) 2 *only*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(*please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature *SP. Gilholm* Date 19 March 2003

12. Name and daytime telephone number of person to contact in the United Kingdom S P Gilholm 01904 732120

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

Patents Form 1/77

Improvements to Rendering Presses

This invention relates to a novel method of extracting fluids from oil or fat bearing materials, such as rendered bone material and to novel apparatus related thereto, e.g. a mechanical screw press incorporating a worm assembly.

A number of screw press manufacturers design continuous mechanical screw presses for use in the rendering industry which incorporate a worm assembly rotatably driven by a drive shaft. Conventionally, presses comprise a known worm assembly rotating within a drained "Cage" or tunnel from which oils and/or fats are expelled, e.g. radially.

In use, pre-cooked process material enters the press at a feed end of the press and is subjected to continuously increasing pressure until it is discharged as 'cake' at a discharge end of the press, for example, via an hydraulically-adjustable annular choke assembly. Derivatives of the basic design, incorporating similar worm assemblies and/or similar choke assemblies, are also known.

De Smet Rosedowns (DSR) are UK-based manufacturers of screw presses and spare parts for both the vegetable oil extraction industry and for the rendering industry. Over the years, DSR has been at the forefront of design innovation for improving the performance of screw presses in terms of increased throughput, lower residuals and reduced power consumption. Such improvements rely on an intimate knowledge of press operation and on the ability to predict changing pressure and flow conditions within a press. An important aspect of DSR business is the design and manufacture of performance enhancing worm assemblies for fitting to presses originally manufactured by competitors.

Recent developments in screw presses have tended towards addressing the wear that occurs on the flights of worm assemblies. Thus, for example, European Patent application No. 0 540 222 describes the use of a bi-metallic worm assembly.

However, it should be noted that the design of the worm assembly itself is conventional.

5 Mechanical screw presses find utility in a number of areas, including extraction of oils from seeds and/or nuts and extraction of fats from animal by-products. It will be understood that reference hereinafter to 'process material' should be construed generally as meaning products used in the Rendering Industry, such as animal carcasses.

10 Recent developments in the extraction of oil from seeds, using mechanical screw presses, have utilised a novel multi-stage approach of sequentially pressing, mixing and pressing the seeds. Whilst this method has been found to be advantageous in seed presses, it has hitherto been considered unsuitable for use in rendering screw presses, due, *inter alia*, to the risk of clogging of the mixing portion of the worm
15 assembly in the screw press.

Nevertheless, we have now surprisingly found that, not only can conventional screw presses be adapted to include a mixing region in the worm assembly, but, in use, this results in a significantly improved yield of oil/fat from the mechanical press.
20 Recently, a DSR conversion of a Dupps press has yielded dramatic improvements in throughput (around 50%) with no significant deterioration in residual fat levels. Furthermore, no increase in power consumption or wear of critical parts was observed. (measured per ton of material processed) Indeed, in some instances power consumption was reduced.

25 Thus, according to the invention we provide a method of extracting liquids from process material which comprises the sequential steps of compressing the process material; decompressing and mixing the process material; and further re-compressing the process material in a mechanical screw press.

30

The step of decompressing and mixing may occur separately, simultaneously or sequentially. In one embodiment described herein decompression and mixing steps may occur separately. In such a case it is preferred that the decompression substantially precedes the mixing. However, in the most preferred embodiment and
5 the embodiment hereinafter described in the examples, the decompression and mixing occur simultaneously.

The decompression/mixing process can be carried out using a mixer assembly as hereinafter described. However, preferably the decompression/mixing process can be
10 carried out using a compression mixer. A compression mixer, which may also be referred to as a Hump mixer, is especially advantageous in that, *inter alia*, it will produce an extra compression just prior to the decompression and mixing zone. Thus, it will be understood that a compressor mixer may comprise a frusto conical (compressor) member and an optionally integral mixing member.

15 Extraction of fat in, for example, a Dupps press using the original assembly (Fig 1) is by a process of continuously increasing the pressure applied to the process material as it moves from the intake to the discharge end of the press. However, there comes a point at which the pressure required to expel further fat is disproportionately high.
20 The DSR worm assembly (Fig 2) relies on the principle analogous to that involved in wringing water from a wet towel; beyond a certain point no further water can be removed by sustained wringing. However, if the towel is unfolded and wrung out again then more water can be removed. In a screw press, this effect can be achieved by introduction of one or more humps and one or more mixers into the assembly. It
25 is within the scope of the method of the present invention for the decompression/mixing to occur by use of a mixer, e.g. fitted to the worm shaft. However, preferably the mixer comprises of the combination of the Hump and Mixer. Pressure is built up initially by the combined action of helical worms and a tapered distance piece (or hump) and some fat is expelled. Pressure is then allowed
30 to fall as the process material enters a mixing region, after which pressure is re-applied and more fat is expelled.

Furthermore, a measure of the compression can be described in terms of volume reduction (see figures 3a and 3b). Thus, a conventionally known mechanical screw press (figure 3a) will show a substantially constant volume reduction of the
5 compressed material along the length of the worm assembly. This contrasts with the volume reduction observed with the method of the present invention. Due to the incorporation of a compression/mixing stage mounted in the worm assembly, the volume reduction is not constant. Indeed, at the point in the assembly where the mixer is positioned, an increase in the volume of the compressed material is
10 observed. This may be an important feature of the present invention. The effect of these design modifications can be seen by comparing the Volume Reduction Curves for the two worm assemblies, from which the differences in pressure build-up along the press can be seen (Fig 3a & 3b).

15 Thus, according to an alternative aspect of the present invention we provide a method of extracting liquids from the process material which comprises the sequential steps of reducing the volume of the process material; increasing the volume of the process material; and reducing the volume of the process material in a mechanical screw press.

20

During trials of a DSR conversion of a Dupps press, it was also found that a further advantage was that there was no necessity to use the hydraulic choke to regulate pressure and there was much reduced burning and smoking of the residual cake. The performance improvements observed resulted from a fundamental analysis of the
25 existing worm assembly and the judicious application of modifications to improve the flow and mixing of the process material. The pressure and/or speed of rotation of the worm, spacing between the worm and/or flights and the tunnel may be conventionally known *per se*. Thus, the press may optionally be provided with a choke, e.g. at the discharge end of the press. However, it is a particular advantage of
30 the method of the invention that in many systems a choke is deemed unnecessary.

The method of the invention is advantageous in that, *inter alia*, an increased throughput of material is achieved. This increased throughput thus results in an increase in production rate with no detriment to the product quality.

- 5 The position of the compression mixer may vary according to the size and nature of the worm assembly, the material to be compressed, etc. However, in a preferred embodiment of the method of the invention, when the assembly is provided with a single compression mixer, the compression mixer is positioned close to the middle of the worm assembly, for example, at a position of between 40% and 70% of the length
10 of the assembly, and preferably at between 50 and 65% of the length of the worm assembly, as measured from the feed inlet end. However, when the assembly is provided with more than one compression mixer, e.g. two compression mixers, they may be substantially evenly spaced along the length of the worm assembly. Thus, a first compression mixer may be positioned between 25 to 40% of the length of the
15 worm assembly and a second compression mixer may be positioned between 60 and 80% of the length of the worm assembly.

The use of compression mixers in the extraction of oil from seeds etc is known.

- 20 Generally, the compression mixer comprises a tapered compression region and a mixer region. However, in the extraction of liquids from the process material, conventional mixers in the form of devices incorporating radially projecting elements e.g. in the form of a toothed disc, are unsuitable, due *inter alia*, to snagging, etc. Thus, the mixer may comprises an element adapted to disrupt the flow of material,
25 this may be a multirecessed cog, a toothed disc, or any combination of the aforesaid. However, in the method of the invention a preferred mixer comprises a multirecessed cog.

- In one embodiment of the invention, the method may also include a temperature
30 control element to facilitate flow. Thus, warming or heating the system may

facilitate flow of e.g. high melting fats at start up and, optionally, cooling may be used later in the process, thus further optimising fat extraction.

According to a further aspect of the invention, we provide a mechanical screw press
5 comprising a worm assembly adapted to extract liquids from the process material by the sequential steps of compressing; decompressing and mixing; and recompressing the process material in a mechanical screw press.

According to a further aspect of the invention, we provide a mechanical screw press
10 comprising a worm assembly provided with a plurality of circumferential flights and a compression mixer stage along the length of the worm assembly.

In this further aspect of the invention, the mechanical screw press may include a plurality of compression mixer stages.

15 Alternatively, we provide a mechanical screw press comprising a worm assembly adapted to extract liquids from process material by the sequential steps of volume reduction, volume increase and volume reduction.

20 The mechanical screw press of the invention comprises a worm assembly wherein the assembly is provided with at least one mixer region. Preferentially the mixer region is a combined compression/mixing region, e.g. a compression mixer as hereinbefore described.

25 We also provide the use of a worm assembly as hereinbefore described.

The use of the compression mixer in process material compression is also novel *per se*. Therefore according to a further aspect of the invention we provide the use of a compression mixer as hereinbefore described in the extraction of liquids from
30 process material.

The invention will now be described by way of example only and with reference to the accompanying drawings in which Figure 1 is a representation of a Dupps screw press of the prior art;

Figure 2 is a representation of a modified Dupps screw press provided with a
5 compression mixer region; and

Figures 3a and 3b are graphical representations of volume reduction curves produced from a prior art Dupps Screw press and a modified Dupps screw press.

Referring to Figure 1, a prior art arrangement (1) comprises a Cage (2) and worm
10 assembly (3). The worm assembly (3) comprises a plurality of modular units (4) each fitted with an external flight (5). The press comprises a feed inlet end (6) and a discharge end (7).

Referring to Figure 2, the novel Arrangement (21) comprises a Cage (22) and worm
15 assembly (23). The assembly (23) comprises a plurality of modular units (24) each fitted with an external flight (25). Close to the middle (28) of the worm assembly (23) a compressor/mixer (29) is positioned. The compressor mixer (29) comprises a frusto conical member (200) which is shaped to compress the process material (201) (not shown). The larger diameter end (202) of the frusto conical member (200) of the
20 frusto conical member (200) is provided with a mixer (203). The mixer (203) is itself made up of a plurality of circumferential recesses (204) around the periphery (205) of the mixer.

In use, process material passes along the worm assembly due to the action of the
25 flights. When the material reaches the compression mixer, the process material is further compressed and then allowed to expand in volume and mixed.

30 P101880GB.9

CLAIMS

1. A method of extracting liquids from the process material which comprises the sequential steps of compressing the process material; decompressing and mixing the process material; and then recompressing the process material; in a mechanical screw press.
5
2. A method of extracting liquids from the process material which comprises the sequential steps of reducing the volume of the process material; increasing the volume; and reducing the volume of the process material; in a mechanical screw press.
10
3. A method according to claims 1 or 2 characterised in that the decompression and mixing step or the increasing volume step occurs separately, simultaneously or sequentially.
15
4. A method according to claims 1 or 2 characterised in that an improvement in throughput is of in the region of 50% w/w.
- 20 5. A method according to claim 4 characterised in that the improvement in throughput is from 20 to 60%.
6. A method according to claim 5 characterised in that the improvement in throughput is from 30 to 50%.
25
7. A method according to claims 1 or 2 characterised in that the extraction apparatus comprises an assembly of worms and/or flights in a tunnel provided with a feed end and a discharge end.
- 30 8. A method according to claim 7 characterised in that the worm assembly is provided with at least one mixer region.

9. A method according to claim 8 characterised in that the mixer region comprises a compressor/mixer region.
- 5 10. A method according to claim 8 characterised in that the mixer comprises an element adapted to disrupt the flow of material.
11. A method according to claim 8 characterised in that the mixer comprises a multirecessed cog, a toothed disc, or any combination of the aforesaid.
- 10 12. A method according to claim 11 characterised in that the mixer comprises a multirecessed cog.
13. A method according to claim 8 characterised in that the compressor
15 comprises a frusto conical member.
14. A method according to claim 13 characterised in that the frusto conical member is smaller in diameter at the feed inlet end and greater in diameter at the discharge end.
- 20 15. A method according to claim 9 characterised in that the compression mixer is positioned at the discharge end.
16. A method according to claim 8 characterised in that the mixer is positioned
25 close to the middle of the worm assembly.
17. A method according to claim 9 characterised in that the compression mixer is positioned close to the middle of the worm assembly.
- 30 18. A method according to claims 16 or 17 characterised in that the compression mixer is positioned at between 50 and 65% of the length of the worm assembly.

19. A method according to claim 18 characterised in that the compression mixer is positioned at between 50 to 60% of the length of the worm assembly as measured from the feed inlet end.
- 5
20. A method according to claim 8 characterised in that the worm is provided with a plurality of mixer regions.
21. A method according to claim 20 characterised in that the plurality of
- 10 compression mixers are substantially evenly spaced along the length of the worm assembly.
22. A method according to claim 21 characterised in that the first compression mixer is positioned between 25 to 40% of the length of the worm assembly; and a
- 15 second compression mixer is positioned between 60 and 80% of the length of the worm assembly.
23. A method according to claims 1 or 2 characterised in that the method includes a temperature control element to facilitate flow.
- 20
24. A method according to claim 3 characterised in that the extraction apparatus is provided with a choke.
25. A method according to claim 3 characterised in that the extraction apparatus
- 25 is not provided with a choke.
26. A mechanical screw press comprising a worm assembly adapted to extract liquids from the process material by the sequential steps of compressing; decompressing and mixing; and recompressing the process material.
- 30

27. A mechanical screw press comprising a worm assembly adapted to extract liquids from the process material by the sequential steps of volume reduction, volume increase; and volume reduction.

5 28. A mechanical screw press according to claims 26 or 27 characterised in that the decompression and mixing step or the increasing volume step occurs separately, simultaneously or sequentially.

29. A mechanical screw press according to claims 26 or 27 characterised in that
10 an improvement in the throughput is of in the region of 50% w/w.

30. A mechanical screw press according to claim 29 characterised in that the improvement in throughput is from 20 to 60%.

15 31. A mechanical screw press according to claim 30 characterised in that the improvement in throughput is from 30 to 50%.

32. A mechanical screw press according to claims 26 or 27 characterised in that the extraction apparatus comprises an assembly of worms and/or flights in a tunnel
20 provided with a feed end and a discharge end.

33. A mechanical screw press according to claims 26 or 27 characterised in that the worm assembly is provided with at least one mixer region.

25 34. A mechanical screw press according to claim 33 characterised in that the mixer region comprises a compression mixer.

35. A mechanical screw press according to claim 33 characterised in that the mixer comprises an element adapted to disrupt the flow of material.

30

36. A mechanical screw press according to claim 35 characterised in that the mixer comprises a multirecessed cog, a toothed disc, or any combination of the aforesaid.
- 5 37. A mechanical screw press according to claim 36 characterised in that the compression mixer comprises a multirecessed cog.
38. A mechanical screw press according to claim 34 characterised in that the compressor comprises a frusto conical member.
- 10 39. A mechanical screw press according to claim 38 characterised in that the frusto conical member is smaller in diameter at the feed inlet end and greater in diameter at the discharge end.
- 15 40. A mechanical screw press according to claim 39 characterised in that the compression mixer is positioned at the discharge end.
41. A mechanical screw press according to claim 38 characterised in that the multirecessed cog is positioned at the discharge end of the frusto conical member.
- 20 42. A mechanical screw press according to claim 33 characterised in that the mixer is positioned close to the middle of the worm assembly.
43. A mechanical screw press according to claim 42 characterised in that the
- 25 compression mixer is positioned close to the middle of the worm assembly.
44. A mechanical screw press according to claims 42 or 43 characterised in that the compression mixer is positioned at between 50 and 65% of the length of the worm assembly.

30

45. A mechanical screw press according to claim 44 characterised in that the mixer region is positioned at between preferably 50 to 60% of the length of the worm assembly as measured from the feed inlet end.
- 5 46. A mechanical screw press according to claim 33 characterised in that the worm assembly is provided with a plurality of compression mixers.
47. A mechanical screw press according to claim 46 characterised in that the plurality of compression mixers is substantially evenly spaced along the length of the
10 worm assembly.
48. A mechanical screw press according to claim 47 characterised in that the first compression mixer is positioned between 25 to 40% of the length of the worm assembly; and a second compression mixer is positioned between 60 and 80% of the
15 length of the worm assembly.
49. A mechanical screw press according to claims 26 or 27 characterised in that the press is adapted to include a temperature control element to facilitate flow.
- 20 50. A mechanical screw press according to claims 26 or 27 characterised in that the extraction apparatus is provided with a choke.
51. A mechanical screw press according to claims 26 or 27 characterised in that the extraction apparatus is not provided with a choke.
25
52. The use of a mechanical screw press according to claims 26 or 27 in the extraction of liquids from the process material.
53. The use of a compression mixer in the extraction of liquids from the process
30 material.

54. A method or mechanical screw press substantially as described with reference to the accompanying drawings.

5

10

15

20

25

30

35

40

45 P101880GB.9

Abstract**5 Improvements to Rendering Presses**

There is described a method of extracting liquids from the process material which comprises the sequential steps of compressing the process material; decompressing and mixing the process material; and then recompressing the process material; in a
10 mechanical screw press.

There is also described a mechanical screw press comprising a worm assembly adapted to extract liquids using the aforementioned process.

15

20

25



30

35

40 P101880GB.9


THIS PAGE BLANK (USPTO)

1/2

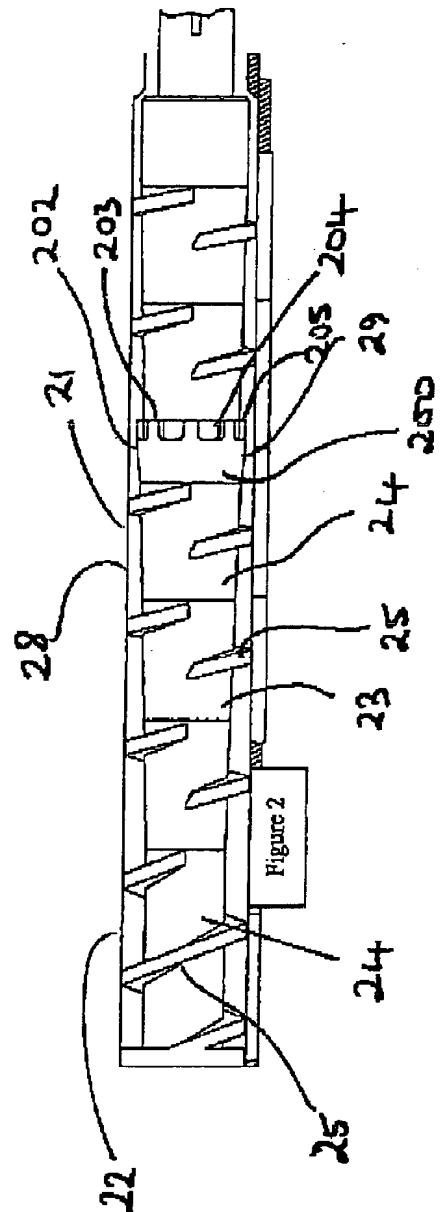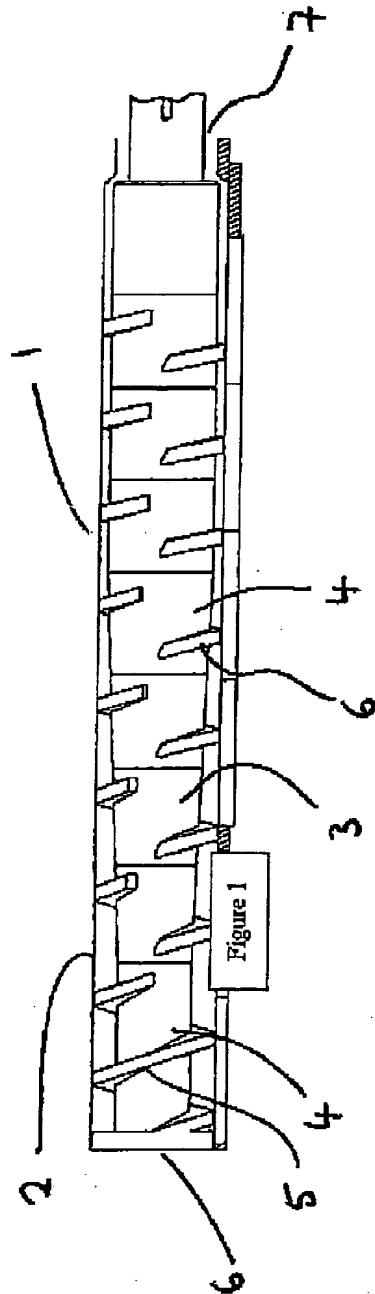


THIS PAGE BLANK (USPTO)

VOLUME REDUCTION CURVE

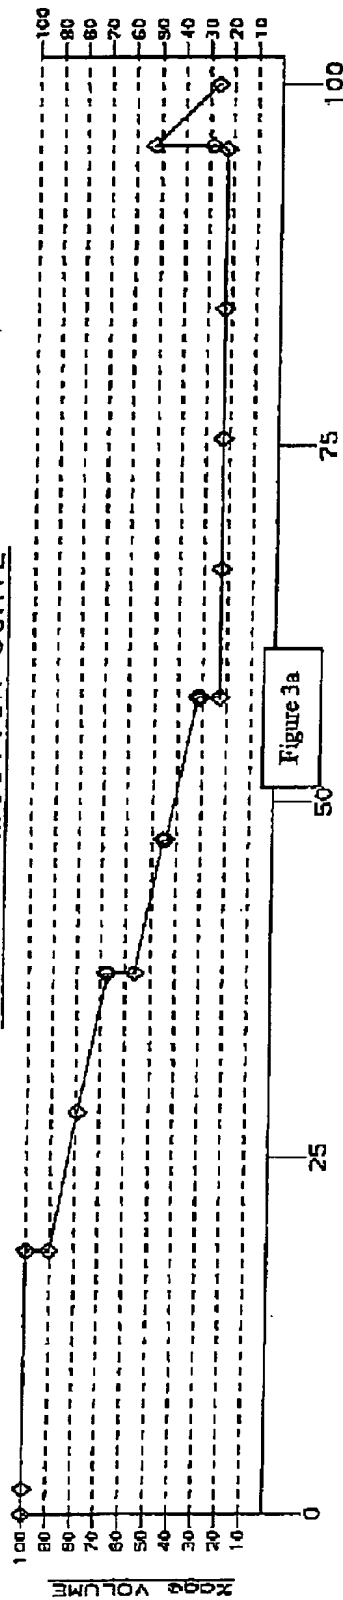

VOLUME REDUCTION CURVE

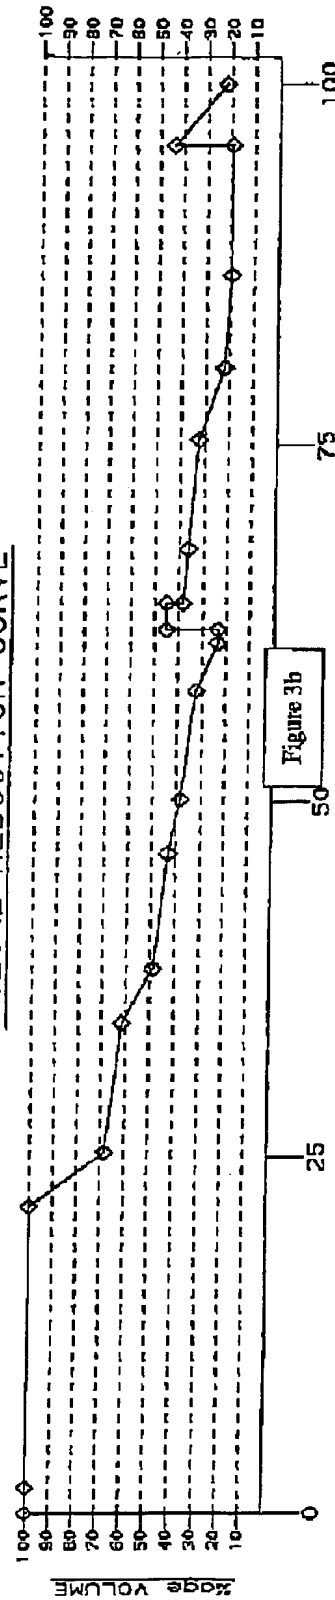

THIS PAGE BLANK (USPTO)